SYMMONS®
the smart choice™

53-458-TRM, 53-460-TRM
Museo™ Diverter Trim Series
Operation & Maintenance Manual



Model Numbers

☐ **53-458-TRM**	*Museo Dual Outlet Diverter Trim*
☐ **53-460-TRM**	*Museo Triple Outlet Diverter Trim*

Specifications

Dual and triple outlet diverter trim made from metal and plastic materials plated in standard polished chrome finish.

Modifications

☐ **-BLK**	*Polished graphite finish*
☐ **-STN**	*Satin nickel finish*

Note: Append appropriate -suffix to model number.

Compliance

-ASME A112.18.1/CSA B125.1

Warranty

Limited Lifetime - to the original end purchaser in consumer installations.
5 Years - for commercial installations.

Refer to www.symmons.com/warranty for complete warranty information.

Dimensions

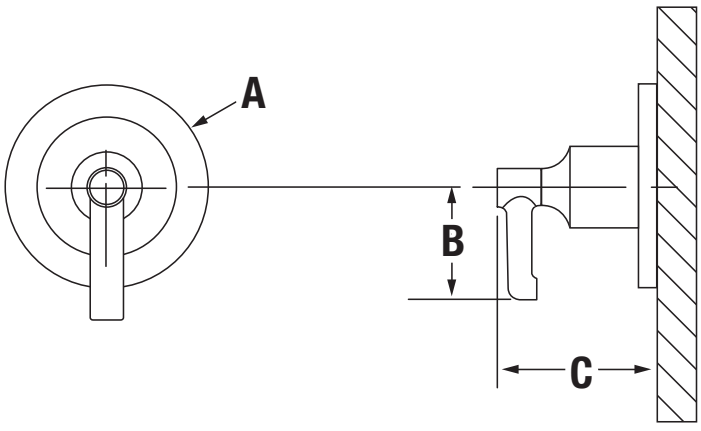

Measurements	
A	Ø 5”, 127 mm
B	3 1/4”, 83 mm
C	3 3/4”, 95 mm

Note: Dimensions are subject to change without notice.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ (800)796-6667 ▪ Fax: (800)961-9621
©2014 Symmons Industries, Inc. ▪ www.symmons.com ▪ gethelp@symmons.com ▪ ZV-3043 REV 0 01/15/2014

SYMMONS®
the smart choice™

53-458-TRM, 53-460-TRM
Museo™ Diverter Trim Series
Operation & Maintenance Manual

Parts Breakdown

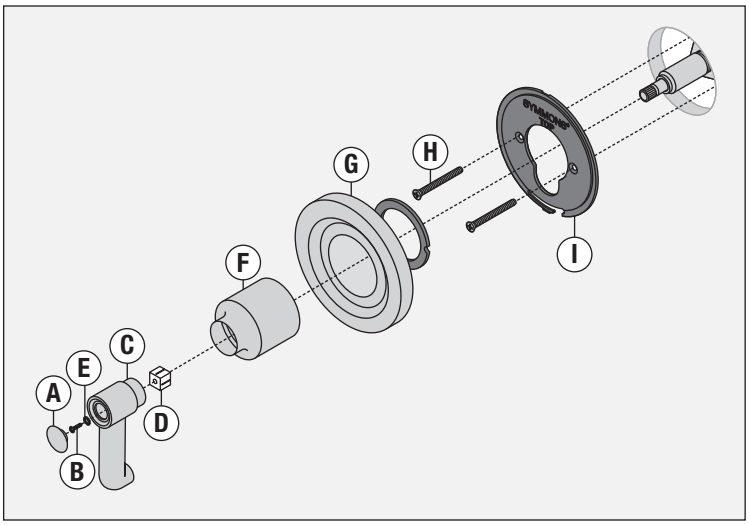

Replacement Parts		
Item	**Description**	**Part Number**
A B C D E	Plug Button Screw Handle Handle Insert Star Washer	T-667
F	Dome Cover	T-666
G H I	Escutcheon Screw Mounting Plate	LLD-103-NS-KIT

Notes:
1) Append -STN to part number for satin nickel finish; -BLK for polished graphite finish.

Required for Installation	
Phillips head screwdriver	

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ (800)796-6667 ▪ Fax: (800)961-9621
©2014 Symmons Industries, Inc. ▪ www.symmons.com ▪ gethelp@symmons.com ▪ ZV-3043 REV 0 01/15/2014

SYMMONS®
the smart choice™

53-458-TRM, 53-460-TRM
Museo™ Diverter Trim Series
Operation & Maintenance Manual

Installation

Note: For rough-in installation, please see valve body installation guide.

1) Install plastic mounting plate (I) to diverter valve (53-458-TRM diverter valve = 4-458E-BODY, 53-460-TRM diverter valve = 4-460E-BODY). Secure with two screws (H).

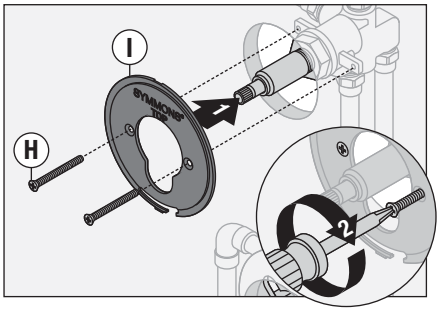

2) Attach diverter escutcheon (G) to plastic mounting plate (I).

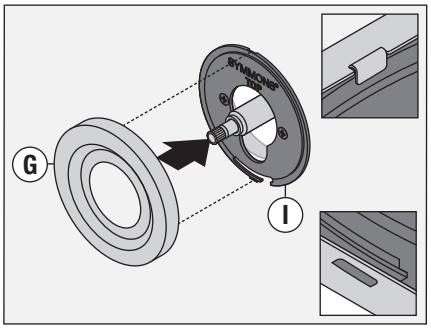

Note: Tabs should snap into place.

3) Install dome cover (F) to valve by turning clockwise.

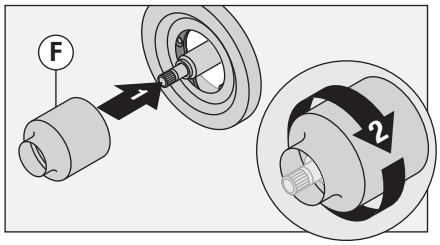

4) Insert handle insert (D) into handle (C). Attach handle (C) to valve.

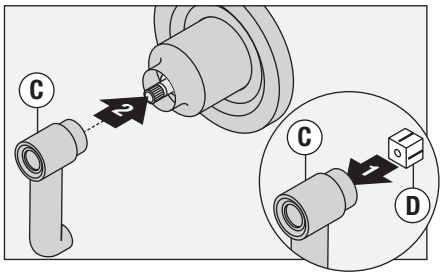

5) Secure handle (C) to valve using star washer (E) and screw (B). Attach plug button (A) to handle.

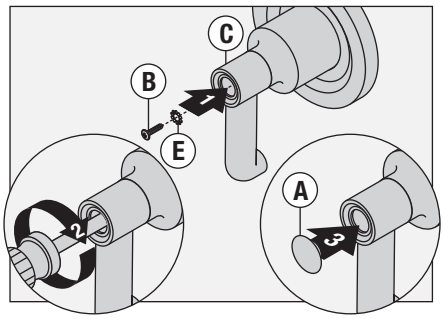

Note: Handle should be facing the 6 o'clock position.

Diverter Control

1) Diverter handle facing straight down is for diverter function 1.

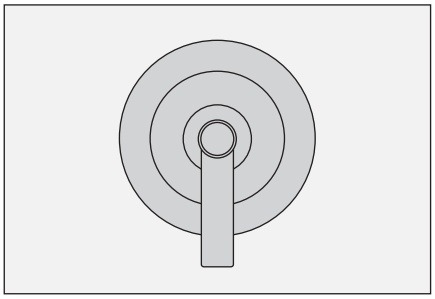

2) **53-458-TRM:** Turn diverter handle counterclockwise one full revolution for diverter function 2. **53-460-TRM:** Turn diverter handle counterclockwise 1/4 turn for diverter function 2.

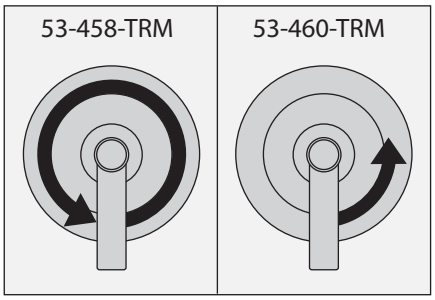

3) **53-460-TRM:** Turn diverter handle counterclockwise 3/4 turn for diverter function 3.

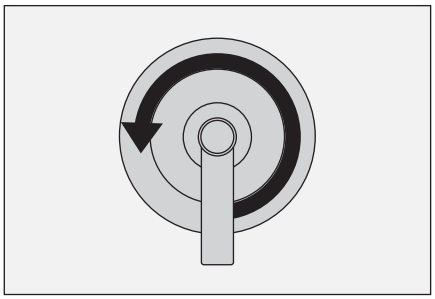

Care and Cleaning

1) Clean finished trim area with a soft cloth using mild soap and water or a non-abrasive cleaner and then quickly rinse with water.

Symmons Industries, Inc. ▪ 31 Brooks Drive ▪ Braintree, MA 02184 ▪ (800)796-6667 ▪ Fax: (800)961-9621
©2014 Symmons Industries, Inc. ▪ www.symmons.com ▪ gethelp@symmons.com ▪ ZV-3043 REV 0 01/15/2014